PLUMBING CONNECTION SCHEDULE

TAG	COLD	HOT	TRAP	DRAIN	VENT	FIXTURE QUANTITY
WC fv	1 1/4"	-	3"	4"	2"	18
UR	3/4"	-	2"	2"	1 1/2"	6
L	1/2"	1/2"	1 1/2"	1 1/2"	1 1/2"	18
FD	-	-	2" MIN OR AS NOTED			7
MB	3/4"	3/4"	3"	3"	1 1/2"	3
EWC	1/2"	-	1 1/4"	1 1/2"	1 1/4"	3

MINIMUM SIZES

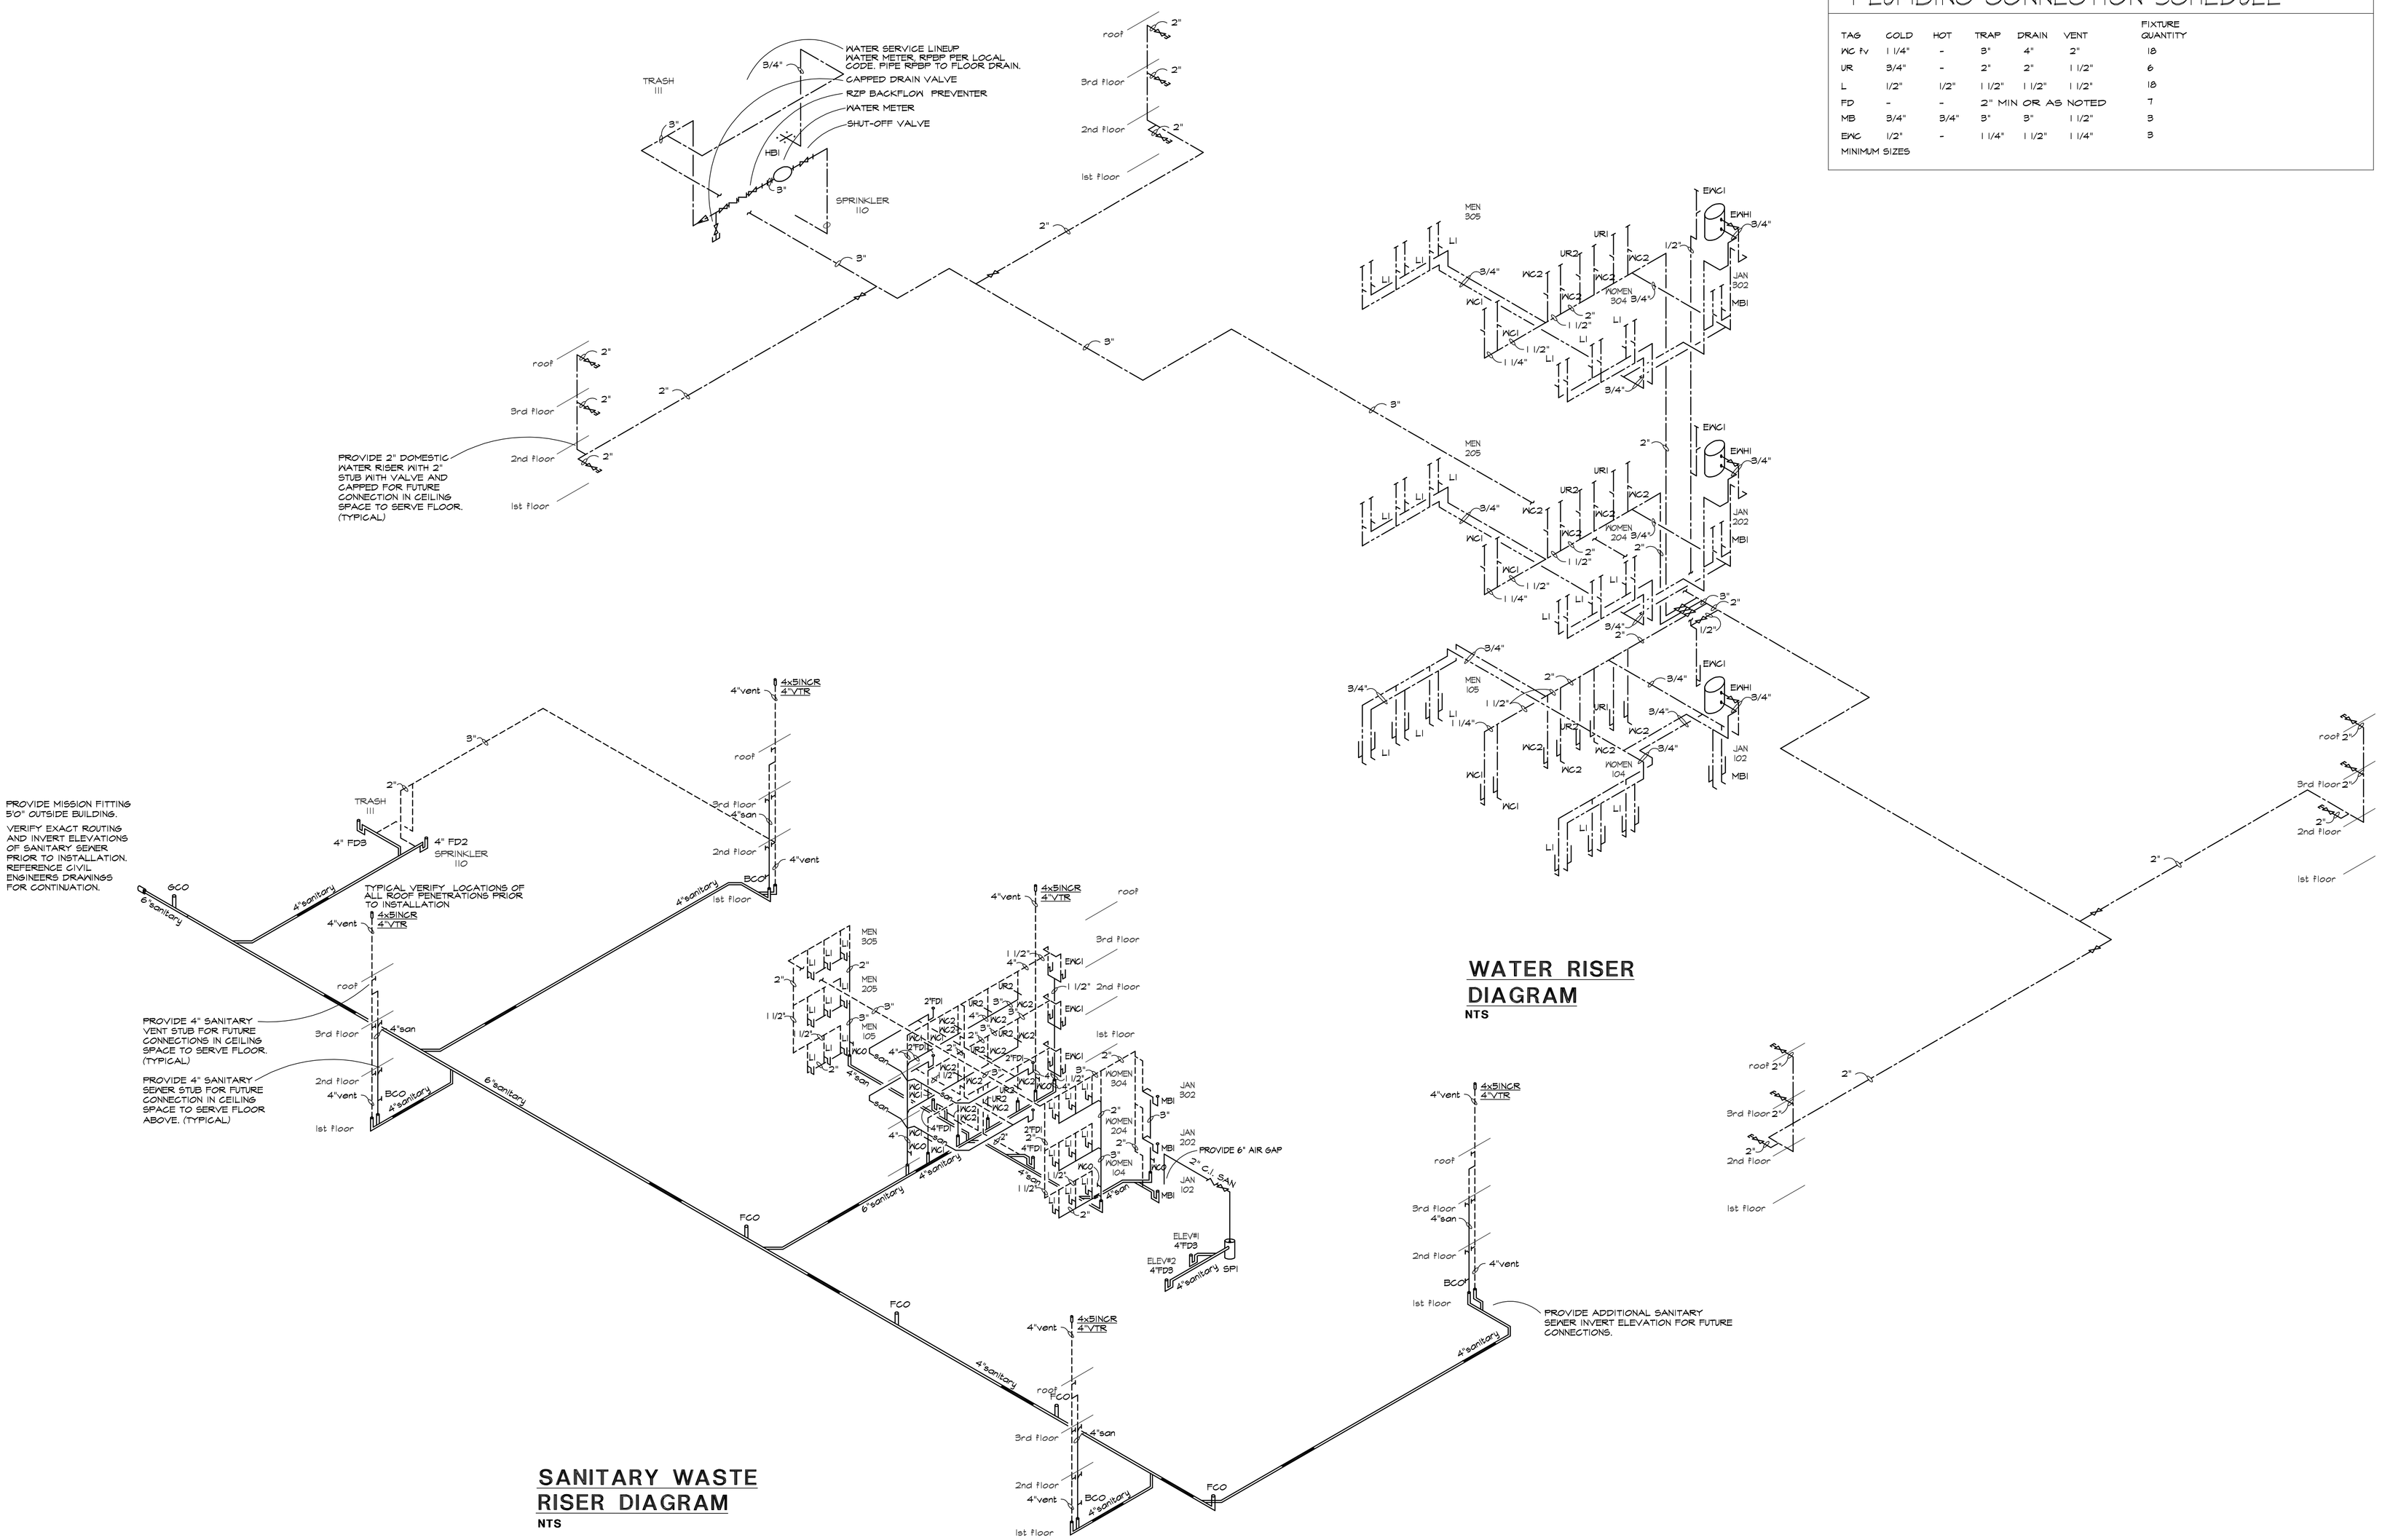

consulting engineers for the construction industry

Wm. J. Hoekstra Engineers, Inc.

HEATING AIR-CONDITIONING PLUMBING ELECTRICAL

5600 West 120th Street Alsip, IL 60803

(708) 389-5558 fax (708) 389-8293

120 HARVESTER DRIVE

THREE STORY OFFICE (SHELL) BUILDING

N.E. CORNER of HARVESTER DRIVE & FRONTAGE ROAD, BURR RIDGE, ILLINOIS

A DEVELOPMENT FOR MARS EQUITIES, INC.

No.	DATE	REVISION DESCRIPTION	No.	DATE	REVISION DESCRIPTION
1	5-31-06	For Permit			

DATE

JOB NUMBER

SHEET No.

P106

11/16/2006 03:56:07 PM